


## CR927 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V
Nominal Capacity	30mAh
Continuous Standard Load	62KΩ
Operating Temperature	-20° - 60°C
Weight	0.6g
Max. Continuous Discharge	0.2mA
Max. Pulse Discharge	5mA




A = 7.4  
 B = 9.5<sup>+0.0</sup><sub>-0.1</sub>  
 C = 2.1  
 D = 2.7<sup>+0.0</sup><sub>-0.2</sub>


Dimension: mm




Discharge Characteristics

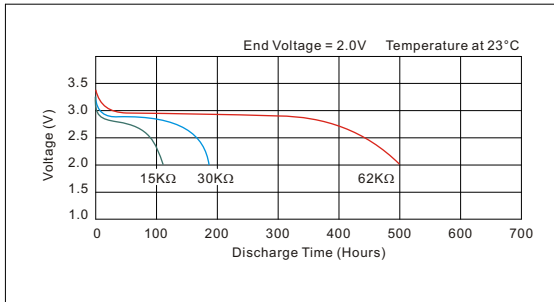


Temperature Characteristics

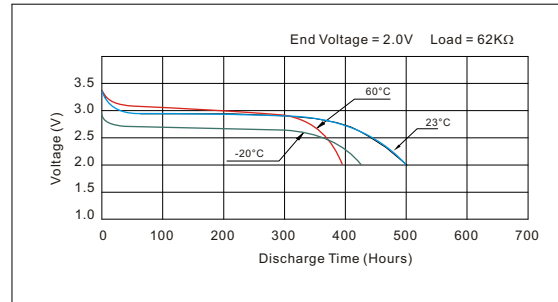


Load vs. Operating Voltage

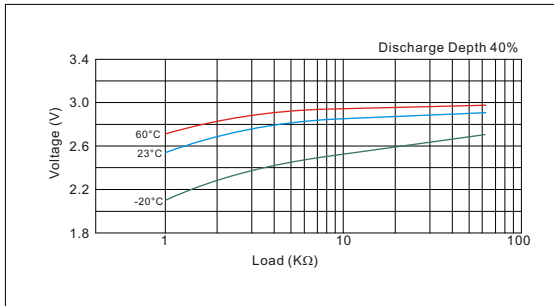


Load vs. Capacity

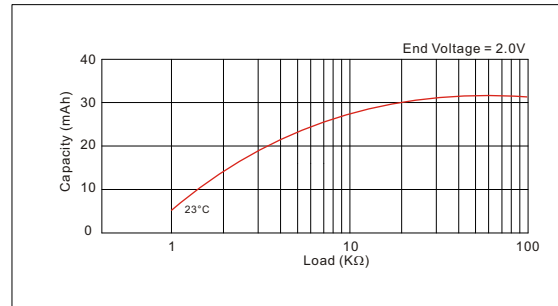

Pulse Discharge Characteristics

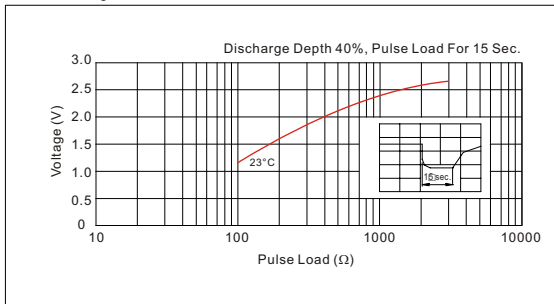

Storage Characteristics

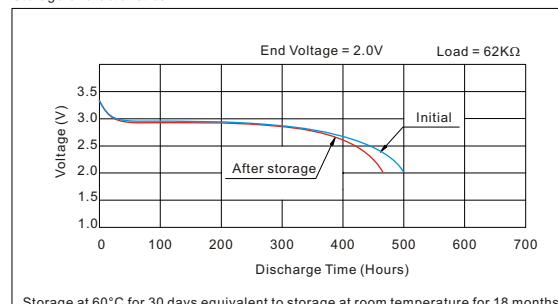

**WARNING:** Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

\*\*Note: The data in this document are for descriptive purposes only and subject to change without prior notice.