

Dimension in mm

Electrical characteristics

- **Nominal Capacity** 500mAh
Stored for one year or less at 2mA, 25°C, 2.0V cut-off
- **Rated Voltage** 3.6V
- **Max. Recommended Continuous Current** 5mA
Current value is determined to be the level at 50% of nominal capacity is obtained with an end voltage of 2.0V at 25°C
- **Max. Pulse Current** 15mA
- **Storage (Recommended Max. Temperature)** 30°C
- **Operating Temperature Range** -55°C~ +120°C
- **Approximate Weight** 9g

ER2450 Specification

Primary Lithium Thionyl Chloride
3.6V, 500mAh

Key Features





- High and stable operating voltage
- Low self-discharge rate - less than 1% after 1 year of storage at +20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport



UL Component Recognition
File Number MH45330

Main Applications

- TPMS
- Smoke detectors
- Memory back-up
- Alarm equipment
- Industrial electronics
- Medical equipment
- GPS tracking

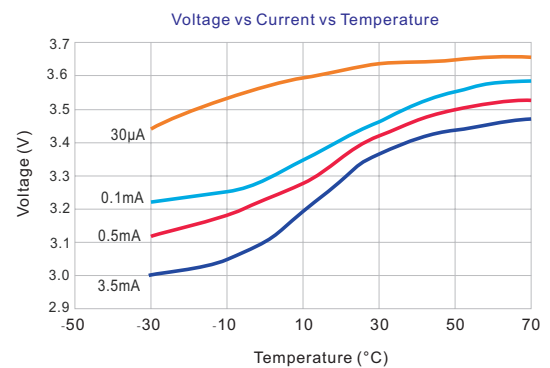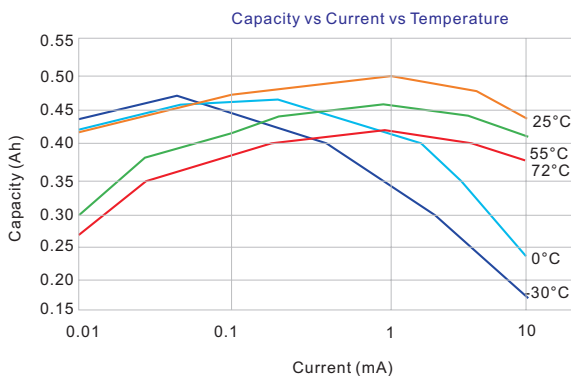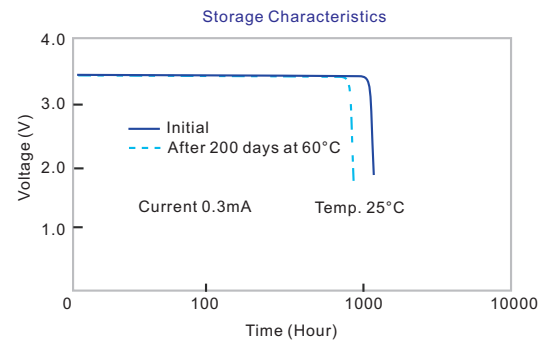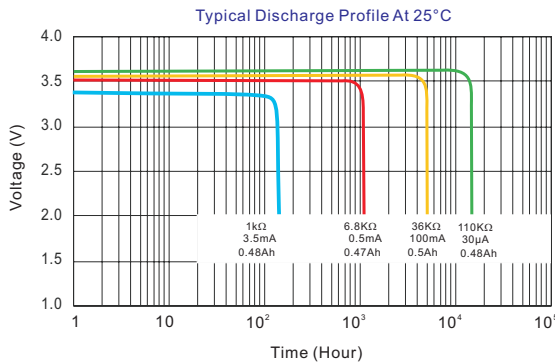

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.